

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number  
WO 02/063278 A1

(51) International Patent Classification<sup>7</sup>: G01N 15/14

(21) International Application Number: PCT/GB02/00097

(22) International Filing Date: 10 January 2002 (10.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0102825.7 5 February 2001 (05.02.2001) GB

(71) Applicant: ABB OFFSHORE SYSTEMS LIMITED  
[—/GB]; 2 High Street, Nailsea, Bristol BS48 1BS (GB).

(72) Inventor: ERIKSSON, Klas, Goran; Bondibraten 107,  
N-1387 Asker (NO).

(74) Agent: NEWSTEAD, Michael, John; Page Hargrave,  
Southgate, Whitefriars, Lewins Mead, Bristol BS1 2NT  
(GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

[Continued on next page]

(54) Title: MONITORING PARTICLES IN A FLUID FLOW

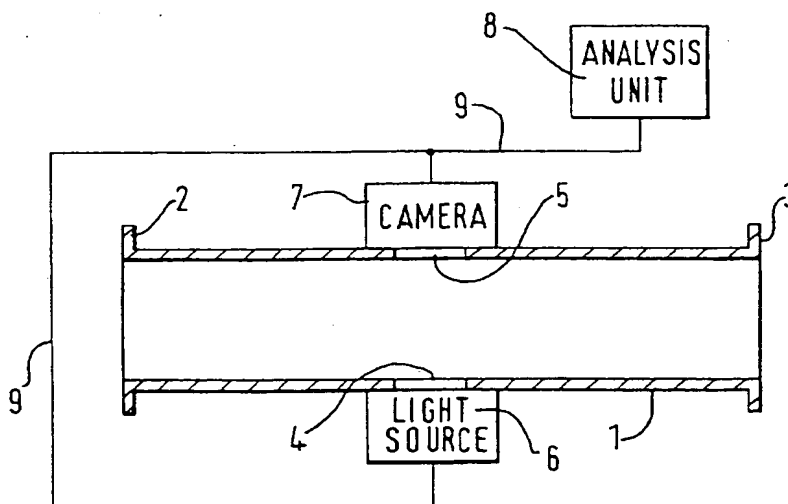

(57) Abstract: Apparatus for use in monitoring particles in a fluid flow comprises: a duct (1) for receiving the fluid flow; light generating means (6) adjacent the duct for transmitting light into the fluid flow via a first at least partially light-transmissive part (4) of the duct; light-responsive detection means (7) adjacent a second at least partially light-transmissive part (5) of the duct for receiving light from the light generating means which has passed through the fluid flow; processing means (8) for location remotely from said duct; and means (9) for coupling the processing means with the detection means, the processing means being adapted for processing signals therefrom to provide data relating to particles in the fluid flow.

WO 02/063278 A1



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(48) Date of publication of this corrected version:**

27 November 2003

**(15) Information about Correction:**

see PCT Gazette No. 48/2003 of 27 November 2003, Section II

## MONITORING PARTICLES IN A FLUID FLOW

The present invention relates to monitoring particles in a fluid flow.

5 In oil production, a by-product is often water. This is commonly disposed of by injecting it under pressure into a well. While injecting this water, a matter of concern is its quality. Among the parameters of interest are the amount of dispersed oil and the amount of solid particles in the water. These parameters affect the injectivity of the water into the well. Particles with sizes down to a few micrometres have been shown  
10 to have a negative influence on the injectivity.

An existing device for monitoring oil particles in water is disclosed in International Patent Application Publication No. WO 00/46586 and is embodied in an analyser called ViPA developed by Jorin Limited, 4 Vulcan Close, Sandhurst, Berkshire, United  
15 Kingdom - see also the paper "On-line determination of particle size and concentration (solids and oil) using ViPA Analyser", Dr Kami Nezhati, et al, presented at the "7<sup>th</sup> Annual International Forum Production Separation Systems", 23 May 2000, Oslo. However, such an analyser uses a special measurement cell, requiring a side-stream in the overall process. Also, the analyser is not directly suitable for subsea operation.

20 According to the present invention, there is provided apparatus for use in monitoring particles in a fluid flow, comprising:

- 25 a duct for receiving the fluid flow;
- light generating means adjacent the duct for transmitting light into the fluid flow via a first at least partially light-transmissive part of the duct;
- light-responsive detection means adjacent a second at least partially light-transmissive part of the duct for receiving light from the light generating  
30 means which has passed through the fluid flow;
- processing means for location remotely from said duct; and

means for coupling the processing means with the detection means, the processing means being adapted for processing signals therefrom to provide data relating to particles in the fluid flow.

5 Said duct may comprise a pipe section provided with means for mounting it in a run of pipework.

Said first and second at least partially light-transmissive parts may comprise first and second windows in a wall of the duct.

10

Said first and second at least partially light-transmissive parts may be diametrically opposite each other.

15

Inside said duct, each of said first and second at least partially light-transmissive parts may have a non-stick coating.

20

Said duct may be provided with means for flushing away deposits from each of said first and second at least partially light-transmissive parts inside the duct. Such flushing means may be located downstream of said first and second at least partially light-transmissive parts. The flushing means may comprise, for each of said first and second at least partially light-transmissive parts, a respective nozzle for directing a flushing fluid at the respective part from inside the duct.

25

Said light generating means may comprise a light-emissive diode, for example a plurality of such diodes, connected for example in parallel.

30

Said light-responsive detection means may comprise a television camera, for example being provided with a lens and frame grabbing means for capturing one magnified single image at a time, focussed inside said duct, the signals received by said processing means representing successive captured images from said grabbing means.

Said processing means may provide data relating to the amount and/or size distribution of particles of a predetermined kind in the fluid flow.

The surface of said first at least partially light-transmissive part inside said duct may be uneven for reducing deposit build-up on it.

5 The apparatus may include a plurality of such light-responsive detection means, and in this case it may be such that only one of said light-responsive detection means is used at a time. Also, each of said light-responsive detection means could be such that it receives light from said second at least partially light-transmissive part.

10 There may be a plurality of such first at least partially light-transmissive parts. In this case, there may be a plurality of such second at least partially light-transmissive parts, each of which is associated with a respective one of said first at least partially light-transmissive parts. In this case, where there is a plurality of light-responsive detection means, each of them may receive light from a respective one of such second at least partially light-transmissive parts.

15

The or each first and second at least partially light-transmissive parts may be associated with respective such flushing means.

20 There may be a plurality of such light generating means. In this case, the apparatus may be such that only one of said light generating means is used at a time. Where there is a plurality of first at least partially light-transmissive parts, each of said light generating means may be associated with a respective one of the first at least partially light-transmissive parts.

25 The invention also comprises apparatus according to the invention in which said duct is mounted in pipework for conveying the fluid flow, the processing means being located at a location remote therefrom and the coupling means coupling the processing means and the light-responsive detection means. Said pipework may be for conveying water into a well in a hydrocarbon production system and in this case the or each first  
30 and second light-transmissive parts, the or each light generating means and the or each light-responsive means may be sub-sea, said remote location being, for example, a topside platform.

The present invention also comprises a method of monitoring particles in a fluid flow, using apparatus according to the invention.

5 The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Fig. 1 is a schematic view of an example of apparatus according to the invention; and Fig. 2 is a detailed view showing how flushing means may be provided.

10 Referring first to Fig. 1, apparatus for use in monitoring particles, e.g. oil particles, in water being injected under pressure into a well in an oil production system comprises: a duct provided by a pipe section 1 having flanges 2 and 3 at opposite ends for mounting it in a run of pipework conveying such water; two diametrically opposite windows 4 and 5 in the wall of the pipe section 1; a light source 6 mounted at the window 4 for  
15 transmitting light into the pipe section 1; light-responsive detection means in the form of a picture capturing unit 7 mounted at the window 5; processing means in the form of an analysis unit 8 mounted at a location remote from the section of pipe 1, e.g. at a topside platform; and a power and communication link 9 which, on the one hand, provides power for the light source 6 and the picture capturing unit 7 and, on the other  
20 hand, provides for a communication channel coupling the picture capturing unit 7 with the analysis unit 8 to provide the latter with signals from the picture capturing unit 7.

25 The pipe section 1, the light source 6, and the picture capturing unit 7 are designed for sub-sea installation, while the analysis unit 8 is designed for a normal office environment. It may be a standard personal computer, with necessary communications facilities and software.

30 Light source 6 sends light through the window 4 into the pipe section 1. The light source 6 can, for example, use light emitting diodes. For redundancy and power increase, several light emitting diodes connected in parallel may be used. For optional further redundancy, several such groups can be used, with one switched on a time. Each such group could be associated with a respective such window 4.

The window 4 used at the light source 6 can optionally be given an uneven surface, taking into use the so called "Lotus effect". This effect is found in nature on the leaves of the lotus flower, and is exploited commercially in several products. The idea is basically that the uneven surface gives less contact area for any particle to attach to, such  
5 that the attracting forces between surface and particle are concentrated in a smaller area. This minimises the attractive force between particle and surface, and thus both minimises deposits forming, and makes flushing of deposits easier.

The picture capturing unit 7 outside the window 5 comprises a miniature television  
10 camera equipped with a microscope lens. The miniature camera captures a magnified picture with a focus slightly inside the window 5.

As the lifetime of the camera may be a concern, as an option a multitude of cameras can be used, which are turned on one by one as others cease to work. This multitude of  
15 cameras can either share the same window 5, or have separate such windows (each of which could be associated with a respective window 4 in the case where there are several such windows).

For each camera, a so-called "frame grabber" freezes one picture from the television  
20 camera at a time. Each frozen picture is then transmitted via the link 9 to the analysis unit 8.

If the pipe section 1 is mounted on the seabed, the analysis can then be mounted on a topside platform in a dry environment.  
25

When one picture has been transmitted to the analysis unit 8, a second picture is taken and transmitted. After a sufficient number of pictures has been analysed (in the order of a few hundred), the analysis unit 8 has built up a good statistical count of the particles present. The analysis unit 8 can see the difference between a dispersed oil droplet and  
30 a solid particle from the shape. Thus, the amount of solid particles and dispersed oil droplets is independently determined.

The analysis unit 8 may process the information from the picture capturing unit 7 as disclosed in WO 00/46586 for example or as in the above-mentioned ViPA analyser of Jorin Limited.

5     The pipe section 1 could be, for example, about 51cm (about 20 inches) long and have an internal diameter of about 15cm (about 6 inches). The windows 4 and 5 can be made of diamond or sapphire, and a suitable non-stick coating can be applied to minimise build-up of, for example, wax deposits.

10    The molecules that can cause build-up are mainly wax and asphaltene molecules. Each window surface is thus tailored to minimise adhesion to such molecules. This will minimise deposits, but possibly not eliminate them completely.

15    In case deposits occur anyway, a secondary method of removing them is required. This may be done by high pressure methanol spraying. In sub-sea installations, high-pressure methanol is routinely available (as it is commonly used for avoiding hydrate formation during shutdown of oil streams).

20    In Fig 2, is shown a methanol nozzle 10, which is used for intermittently flushing away deposits from the window using high pressure methanol injected into the nozzle in the direction of arrow A. The nozzle 10 is mounted downstream of the window 5 (arrow B indicating the direction of flow in pipe section 1) and directs the high pressure spray of methanol to the window 5 as shown by arrow C. There is a further such nozzle, mounted downstream from window 4. In the case where there is a multiplicity of  
25    cameras each with its own window, then each such window would be provided with its respective such nozzle.

30    The above described apparatus, using analysis unit 8, is capable of measuring simultaneously the amount of dispersed oil droplets and dissolved particles, with a resolution down to a few micrometres. Also, data may be provided relating to the amount of solid particles and oil droplets in the fluid flow and/or data relating to size distribution for solid particles and/or oil droplets in the fluid flow. Although the



apparatus is primarily intended for sub-sea installation it could also be used elsewhere and the invention itself is not limited to use in a sub-sea installation.

CLAIMS

1. Apparatus for use in monitoring particles in a fluid flow, comprising:  
a duct for receiving the fluid flow;  
light generating means adjacent the duct for transmitting light into the fluid flow via a first at least partially light-transmissive part of the duct;  
light-responsive detection means adjacent a second at least partially light-transmissive part of the duct for receiving light from the light generating means which has passed through the fluid flow;  
processing means for location remotely from said duct; and  
means for coupling the processing means with the detection means, the processing means being adapted for processing signals therefrom to provide data relating to particles in the fluid flow.
2. Apparatus according to claim 1, wherein said duct comprises a pipe section provided with means for mounting it in a run of pipework.
3. Apparatus according to claim 1 or 2, wherein said first and second at least partially light-transmissive parts comprise first and second windows in a wall of the duct.
4. Apparatus according to any preceding claim, wherein said first and second at least partially light-transmissive parts are diametrically opposite each other.
5. Apparatus according to any preceding claim, wherein inside said duct, each of said first and second at least partially light-transmissive parts has a non-stick coating.

6. Apparatus according to any preceding claim, wherein said duct is provided with means for flushing away deposits from each of said first and second at least partially light-transmissive parts inside the duct.
- 5 7. Apparatus according to claim 7, wherein said flushing means is located downstream of said first and second at least partially light-transmissive parts.
8. Apparatus according to claim 6 or 7, wherein said flushing means comprises, for each of said first and second at least partially light-transmissive parts, a  
10 respective nozzle for directing a flushing fluid at the respective part from inside the duct.
9. Apparatus according to any preceding claim, wherein said light generating means comprises a light-emissive diode.  
15
10. Apparatus according to claim 9, wherein said light generating means comprises a plurality of such diodes.
11. Apparatus according to claim 10, wherein said diodes are connected in  
20 parallel.
12. Apparatus according to any preceding claim wherein said light-responsive detection means comprises a television camera.
- 25 13. Apparatus according to claim 12, wherein said camera is provided with a lens and frame grabbing means for capturing one magnified single image at a time, focussed inside said duct, the signals received by said processing means representing successive captured images from said grabbing means.
- 30 14. Apparatus according to any preceding claim, which is such that said processing means provides data relating to the amount and/or size distribution of particles of a predetermined kind in the fluid flow.

15. Apparatus according to any preceding claim, wherein the surface of said first at least partially light-transmissive part inside said duct is uneven for reducing deposit build-up on it.
- 5 16. Apparatus according to any preceding claim, including a plurality of such light-responsive detection means.
17. Apparatus according to claim 16, which is such that only one of said light-responsive detection means is used at a time.
- 10 18. Apparatus according to claim 16 or 17, wherein each of said light-responsive detection means receives light from said second at least partially light-transmissive part.
- 15 19. Apparatus according to any preceding claim, wherein there is a plurality of such first at least partially light-transmissive parts.
20. Apparatus according to claim 19 as dependent on any of claims 1 to 17, wherein there is a plurality of such second at least partially light-transmissive parts, each of which is associated with a respective one of said first at least partially light-transmissive parts.
- 20 21. Apparatus according to claim 20 as dependent on claim 16 or 17, wherein each of said light-responsive detection means receives light from a respective one of said second at least partially light-transmissive parts.
- 25 22. Apparatus according to any of claims 19 to 21 as dependent on any of claims 6 to 8, wherein the or each first and second at least partially light-transmissive part is associated with respective such flushing means.
- 30 23. Apparatus according to any preceding claim, wherein there is a plurality of such light generating means.

24. Apparatus according to claim 23, which is such that only one of said light generating means is used at a time.
- 5 25. Apparatus according to either of claims 23 and 24 as dependent on claim 19 or any of claims 20 to 22 as dependent on claim 19, wherein each of said light generating means is associated with a respective one of said first at least partially light-transmissive parts.
- 10 26. Apparatus according to any preceding claim, with said duct mounted in pipework for conveying the fluid flow, the processing means being located at a location remote therefrom and the coupling means coupling the processing means and the light-responsive detection means.
- 15 27. Apparatus according to claim 26, wherein said pipework is for conveying water into a well in a hydrocarbon production system.
- 20 28. Apparatus according to claim 27, wherein said duct, the or each first and second light-transmissive parts, the or each light generating means and the or each light-responsive means are sub-sea.
- 25 29. Apparatus according to claim 28, wherein said remote location is a topside platform.
30. A method of monitoring particles in a fluid flow, using apparatus according to any preceding claim.

1 / 1

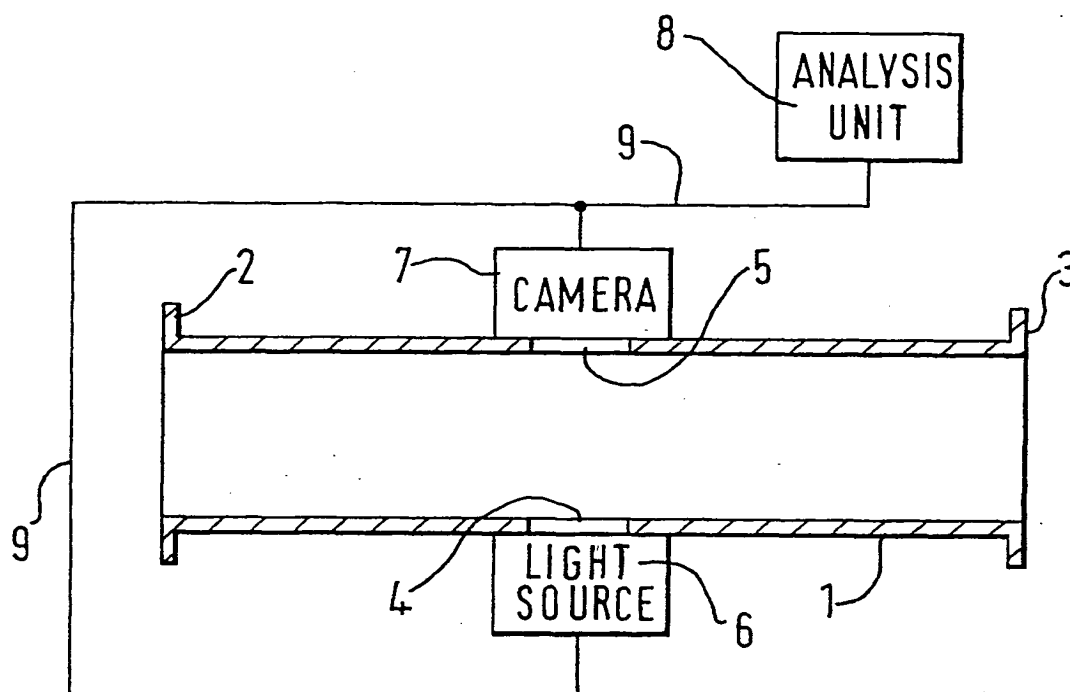


FIG. 1.

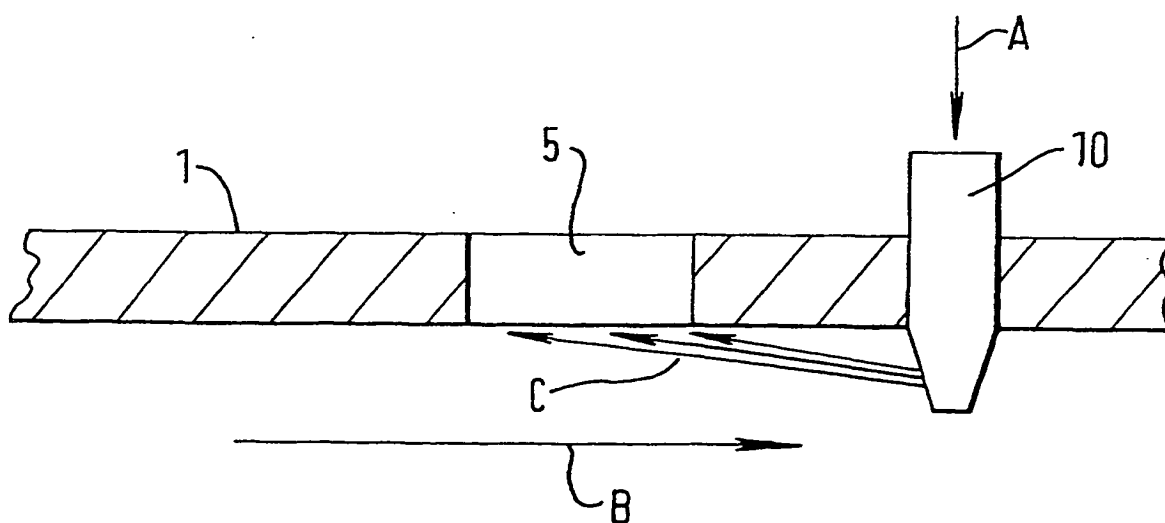


FIG. 2.

SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

In 1st Application No

PCT/GB 02/00097

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 GOIN15/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 GOIN

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 46586 A (GASKIN RODERICK CLIVE ;ROTH NICHOLAS JAMES (GB); JORIN LIMITED (GB) 10 August 2000 (2000-08-10) cited in the application the whole document	1-4, 6, 8, 9, 12-14, 26-30
Y	---	5, 6, 8, 15
Y	US 4 896 047 A (WEAVER KAREN L ET AL) 23 January 1990 (1990-01-23) column 3, line 21-26	6, 8
Y	DE 299 20 014 U (SOPPE STEFAN) 12 October 2000 (2000-10-12) the whole document	5, 15
	---	
	---/---	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

15 April 2002

Date of mailing of the international search report

03/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Müller, T

## INTERNATIONAL SEARCH REPORT

II International Application No. 3

PCT/GB 02/00097

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DR K NEZHATI: "On-line determination of particle size and concentration (solids and oil) using ViPA Analyser - A way forward to control sub sea separators" MERPRO TECHNICAL BULLETIN, 'Online!' no. 15, 11 December 2000 (2000-12-11), pages 1-12, XP002196140 Retrieved from the Internet: &lt;URL:http://www.merpro.com/acrobat/bulleti n15.pdf&gt; 'retrieved on 2002-04-12! cited in the application the whole document -----</p>	1-30

Form PCT/ISA/210 (continuation of second sheet) (July 1992)



## INTERNATIONAL SEARCH REPORT

Int  
nal Application No  
PCT/GB 02/00097

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0046586	A	10-08-2000	AU	2308500 A		25-08-2000
			EP	1159599 A1		05-12-2001
			WO	0046586 A1		10-08-2000
<hr/>						
US 4896047	A	23-01-1990	EP	0337108 A2		18-10-1989
			JP	1305341 A		08-12-1989
<hr/>						
DE 29920014	U	12-10-2000	DE	29920014 U1		12-10-2000
<hr/>						

**THIS PAGE BLANK (USPTO)**